

Saniaccess 1-2-3

Macerators equipped with top access traps for easy servicing



Saniaccess 3
Saniaccess 2
Saniaccess 1



5 m
100 m



BV Cert. 0015304



PRODUCT BENEFITS

- 3 models for all needs - WC only or for a complete bathroom.
- Easy maintenance with double access to the product.
- Ideal for rental properties.

CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40, 100 mm

• Direct access to the basket in case of blockage due to improper use of the device without dismantling the device and emptying the tank.



Single blade cutter




PACKAGING

Saniaccess, non-return valve, connectors, activated carbon filter included to neutralise odours

CURVE

Discharge height (m)

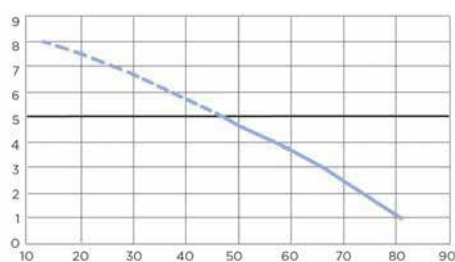


Flow rate (l/min)

TECHNICAL FEATURES


	1	2	4
Number of entries	1	2	4
External inlet diameter	40, 100 mm		
Discharge diameter ext.	22/28/32 mm		
Min. shower tray height	15 cm		
Max. incoming temperature	35 °C		
Frequency Voltage	220-240 V - 50-60 Hz		
Motor power	400 W		
IP rating	IP44		
Electrical class	I		
Noise level	46 dB(A)		
Identification and logistics			
Gross weight	7 kg		
Factory code	SANIACCESS1	SANIACCESS2	SANIACCESS3

DIMENSIONS

Saniaccess*1-2



Saniaccess*3



Dimensions (mm)