

# Saniflo



The original macerator pump unit that allows installation of an extra WC when a conventional solution isn't possible.



4 m  
100 m



BY Cert. 6043364



## PRODUCT BENEFITS

- Perfect for draining wastewater from a toilet.
- Suitable for use in a basement or loft conversion.
- Quiet product.

## CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 100 mm



Single blade cutter




## PACKAGING

Saniflo, non-return valve, connectors, activated carbon filter to neutralise odours

## CURVE

Discharge height (m)

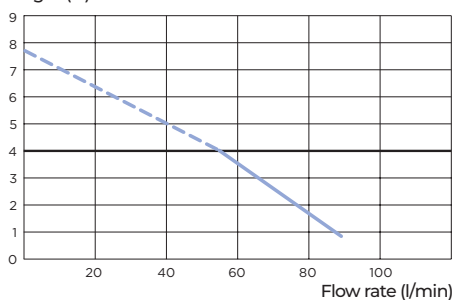

## TECHNICAL FEATURES

Number of entries	1
External inlet diameter	100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35 °C
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	5.6 kg
Factory code	SXSTD

## OPTIONAL

**Sanialarm**  
Factory code : ALARM  
See pg. 19



## DIMENSIONS

