

Sanibest Pro



Heavy duty macerator pump suitable for commercial applications.



7 m
110 m



BY Cert 0015364



PRODUCT BENEFITS

- Suitable for intensive use in commercial environments.
- Direct access to electronic components.

CONNECTIONS

← Discharge diameter ext.: 22/28/32 mm

Access directly to the electrics via the lid

→ External inlet diameter: 40, 100 mm



Pro X K2 grinder




PACKAGING

Sanibest Pro, non-return valve, connectors, activated carbon filter included to neutralise odours

CURVE

Discharge height (m)

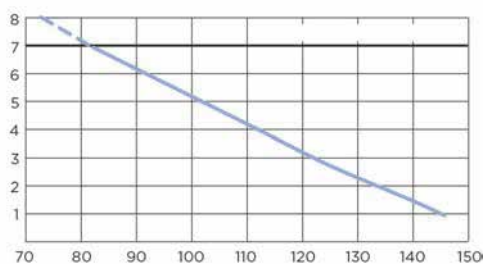

Flow rate (l/min)

TECHNICAL FEATURES



Number of entries	4
External inlet diameter	40, 100 mm
Discharge diameter ext.	22/28/32 mm
Min. shower tray height	15 cm
Max. incoming temperature	35 °C
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	1100 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	12 kg
Factory code	B3PRO

OPTIONAL

Sanialarm
Factory code : ALARM
See pg. 19



DIMENSIONS



Dimensions (mm)